

*ALL STONE / 0.30 COLOURS ARE AVAILABLE AS BOTH RIGICORE CLICK 5.0 AND GLUE DOWN 2.0



RIGICORE 5.0 / RB36542
GLUEDOWN 2.0 / DB36542

WHIPPED CONCRETE GREIGE



RIGICORE 5.0 / RB36536
GLUEDOWN 2.0 / DB36536

SANDED CONCRETE DARK



RIGICORE STONE

CONSTRUCTION / CONSTRUCTION / COSTRUZIONE / CONSTRUCTIE / KONSTRUKTION	
TOTAL THICKNESS / ÉPaisseur TOTALE / SPESSORE / TOTALE DIKTE / TOTAL DICKE	
WEAR LAYER / COUCHE D'USURE / STRATO D'USURA / SLITJLAG / NUTTSCHICHT	
UTILIZATION CLASS / CLASSE D'USAGE / CLASSE D'UTILIZZO / GEBRUIKSKLASSE / STRAPAZIERKLASSE	EN 10511 - EN ISO 10582
COATING / PROTECTION / RIVESTIMENTO / BESCHERMUNG / BESCHICHTUNG	
EMBOSSING / STRUCTURE / STRUTTURA / STRUCTUUR / STRUKTUR	
BEVELLED / BISEAUTÉ / BISELLATURA / V-GROEF / ABGESCHRÄGT	
PLANK SIZE / DIMENSIONS DE LA LAME / DIMENSIONI / AFMETING PER PANEEL / ABMESSUNG DER DIELEN	
CARTON PACKING / EMBALLAGES EN CARTON / SCATOLE / KARTONNEN VERPAKKING / KARTONVERPACKUNG	
PALLET PACKING / BOTES PAR PALETTE / NR SCATOLE A PALETTA / DOZEN PER PALLET / VERPAKKUNG AUF PALETTE	
IMPACT SOUND REDUCTION / RÉDUCTION DU BRUIT D'IMPACT / RIDUZIONE DEL RUMORE DA CALPESTIO / IMPACT GELUIDVERMINDERING / AUSWIRKUNG KLANG REDUKTION	EN ISO 717-2
CASTOR CHAIR RESISTANCE / ESSAI DE LA CHAISE À ROULETTES / PROVA CON POLTRONA A ROTELLE / ROLWEERSTAND BUREAUSTOEL / STUHLROLLENWIDERSTAND	EN ISO 4910 - EN 425
MICRO-SCRATCH RESISTANCE / RÉSISTANCE AUX MICRO-RAYURES / RESISTENZA AI MICRO-GRAFFI / MICRO-KRASBESTÄNDIGHEIT / MIKROKRATZWIDERSTAND	EN 16094
ELECTROSTATIC PERFORMANCE / POTENTIEL DE CHARGE ELECTROSTATIQUE / POTENZIALE DI CARICA ELETTRISTATICA / ELECTROSTATISCHE EIGENSCHAPPEN / ELEKTROSTATISCHE EIGENSCHAFT	EN 1815
SLIP RESISTANCE / ANTIÉPARENT / RESISTENZA ALLO SCIVOLAMENTO / SLIPWEERSTAND / RUIJSCHIFESTIGHEIT	DIN 51130
WEAR RESISTANCE / RÉSISTANCE D'USURE / RESISTENZA ALL'USURA / SLITJVAESTEHOED / VERSCHLEESBESTÄNDIGHEIT	EN 660-2
RESIDUAL INDENTATION / PONÇONNEMENT RÉMANENT / SENSIBILITÀ DI IMPRESSIONE / INDRUKGEVOELHEID / RESTENDRUCK	EN ISO 24343-1
DIMENSIONAL STABILITY / STABILITÉ DIMENSIONNELLE / STABILITÀ DIMENSIONALE / DIMENSIONALE STABILITEIT / DIMENSIONENSTABILITÄT	EN 434
FIRE RATINGS / CLASSIFICATION AU FEU / CLASSIFICAZIONE AL FUOCO / BRANDKLASSE / BRANDKLASSE	EN ISO 9239-1
FORMALDEHYDE EMISSION / EMISSION DE FORMALDÉHYDE / EMISSIONE DI FORMALDEIDE / FORMALDEHYD-EMISSIE / FORMALDEHYD-EMISSIÖN	EN 717-1
WARRANTY FOR DOMESTIC USE / PÉRIODE DE GARANTIE USAGE DOMESTIQUE / GARANZIA PER USO DOMESTICO / GARANTIEPERIODE HUISHOUDELIJK GEBRUIK / GARANTIE FÜR PRIVATGEBRAUCH	
WARRANTY FOR COMMERCIAL USE / PÉRIODE DE GARANTIE USAGE COMMERCIAL / GARANZIA PER USO COMMERCIALE / GARANTIEPERIODE COMMERCIEEL GEBRUIK / GARANTIE FÜR KOMMERZIELLEN GEBRAUCH	

* VALID FOR MODERATE/GENERAL COMMERCIAL USE AS DESCRIBED BY CLASS 32
** VALID FOR LIGHT COMMERCIAL USE AS DESCRIBED BY CLASS 31

WWW.CONTESSE-FLOORS.COM

	STONE XL RIGICORE CLICK 6.0	STONE XL TACKY LOOSE LAY 5.0	STONE XL GLUE DOWN 2.5	STONE CLASSIC RIGICORE 5.0	STONE CLASSIC GLUE DOWN 2.0
4.5 MM RIGICORE - 1.5 MM LAY	5.0 MM SOLID VINYL	2.5 MM SOLID VINYL	4.0 MM RIGICORE - 1 MM LAY	2.0 MM SOLID VINYL	
6.0 MM	5.0 MM	2.5 MM	5.0 MM	2.0 MM	
0.55 MM	0.55 MM	0.55 MM	0.3 MM	0.3 MM	
CLASS 34	CLASS 33 CLASS 42	CLASS 33 CLASS 42	CLASS 32*	CLASS 31**	
ANTISCRATCH PU-GUARD	ANTISCRATCH PU-GUARD	ANTISCRATCH PU-GUARD	PU-GUARD	PU-GUARD	
CONCRETE	CONCRETE	CONCRETE	CONCRETE	CONCRETE	
YES	YES	YES	YES	YES	
465 X 760 MM	457 X 914 MM	457 X 914 MM	305 X 610 MM	305 X 610 MM	
2.12 M ² / 6 TILES	1.672 M ² / 4 TILES	3.34 M ² / 8 TILES	1.86 M ² / 10 TILES	3.34 M ² / 10 TILES	
40 PACKS / 975 KG / PALLET	60 PACKS / 999.6 KG / PALLET	68 PACKS / 1080 KG / PALLET	48 PACKS / 780 KG / PALLET	68 PACKS / 782 KG / PALLET	
22 dB	9 dB	N/A	22 dB	N/A	
PASS	PASS	PASS	PASS	PASS	
MSR-B2	MSR-B1	≥ MSR-B2	≥ MSR-B3	≥ MSR-B3	
< 2 KV	< 2 KV	< 2 KV	< 2 KV	< 2 KV	
R10	R10	R10	R10	R10	
GROUP T	GROUP T	GROUP T	GROUP T	GROUP T	
PASS	PASS	PASS	PASS	PASS	
≤ 0.05%	≤ 0.10%	≤ 0.10%	≤ 0.05%	≤ 0.10%	
BFL-S1	BFL-S1	BFL-S1	BFL-S1	BFL-S1	
CLASS E1	CLASS E1	CLASS E1	CLASS E1	CLASS E1	
25 YEARS	25 YEARS	25 YEARS	15 YEARS	15 YEARS	
10 YEARS	10 YEARS	10 YEARS	5 YEARS*	5 YEARS**	



08

RIGICORE STONE

RIGICORE STONE

RIGICORE CLICK
GLUE DOWN
TACKY LOOSE LAY



LUXURY VINYL FLOORING




3 SYSTEMS, 3 REASONS WHY:



AT CONTESSE, YOU HAVE THE FREEDOM OF CHOICE ON THE INSTALLATION SYSTEM OF YOUR FLOOR

FOR DETAILED INFORMATION SCAN WITH YOUR MOBILE PHONE


NEW MATCHING SKIRTINGS AVAILABLE IN EVERY 0.55 COLOUR

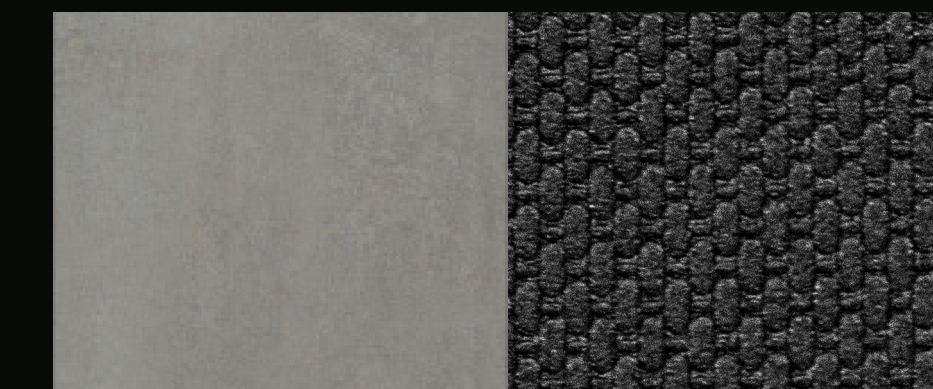

RIGICORE CLICK

BACKSIDE


RIGICORE CLICK

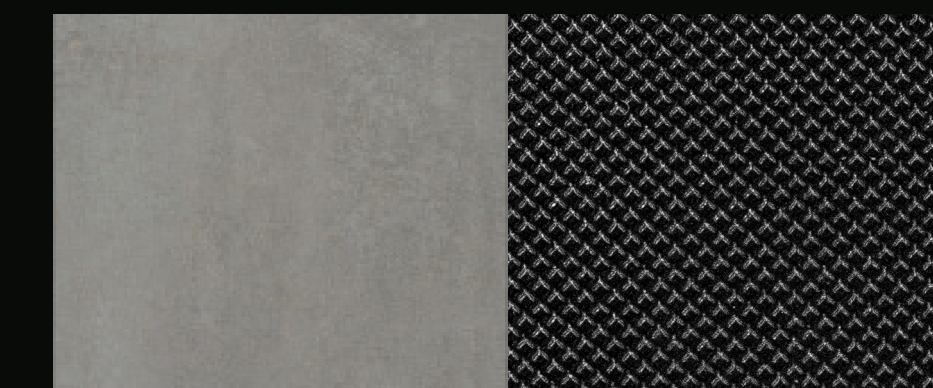

GLUE DOWN

BACKSIDE


GLUE DOWN

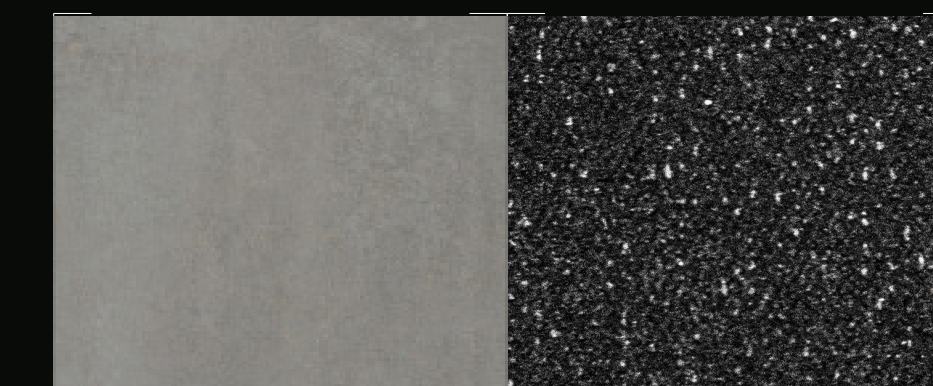



TACKY LOOSE LAY


BACKSIDE




TACKY LOOSE LAY

* ALL STONE / 0.55 COLOURS ARE AVAILABLE AS BOTH RIGICORE CLICK 6.0 AND GLUE DOWN 2.5
** THE COLOURS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0
*** MATCHING SKIRTINGS AVAILABLE FOR ALL STONE / 0.55 COLOURS

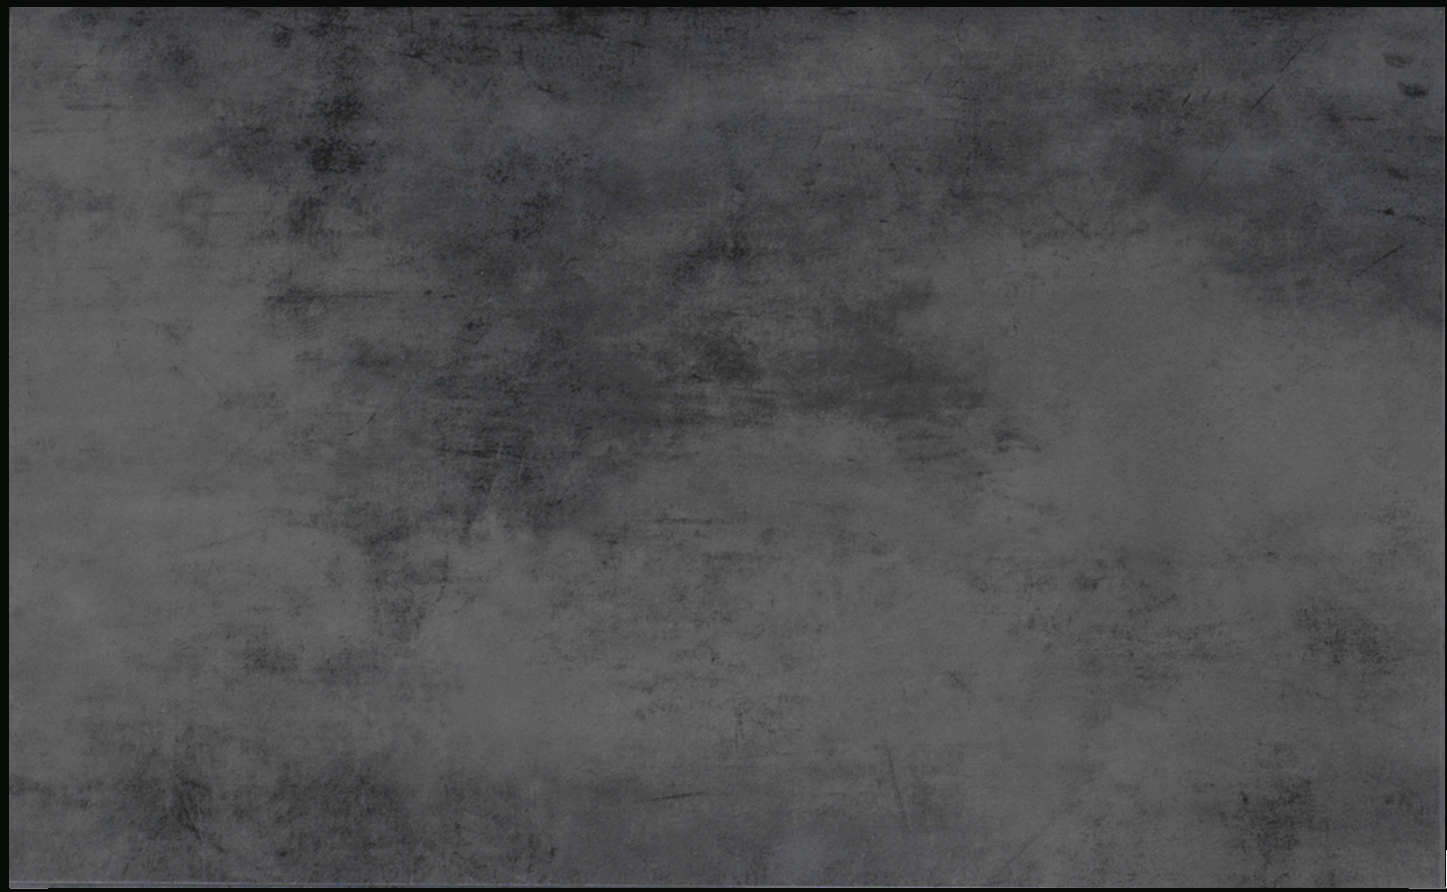


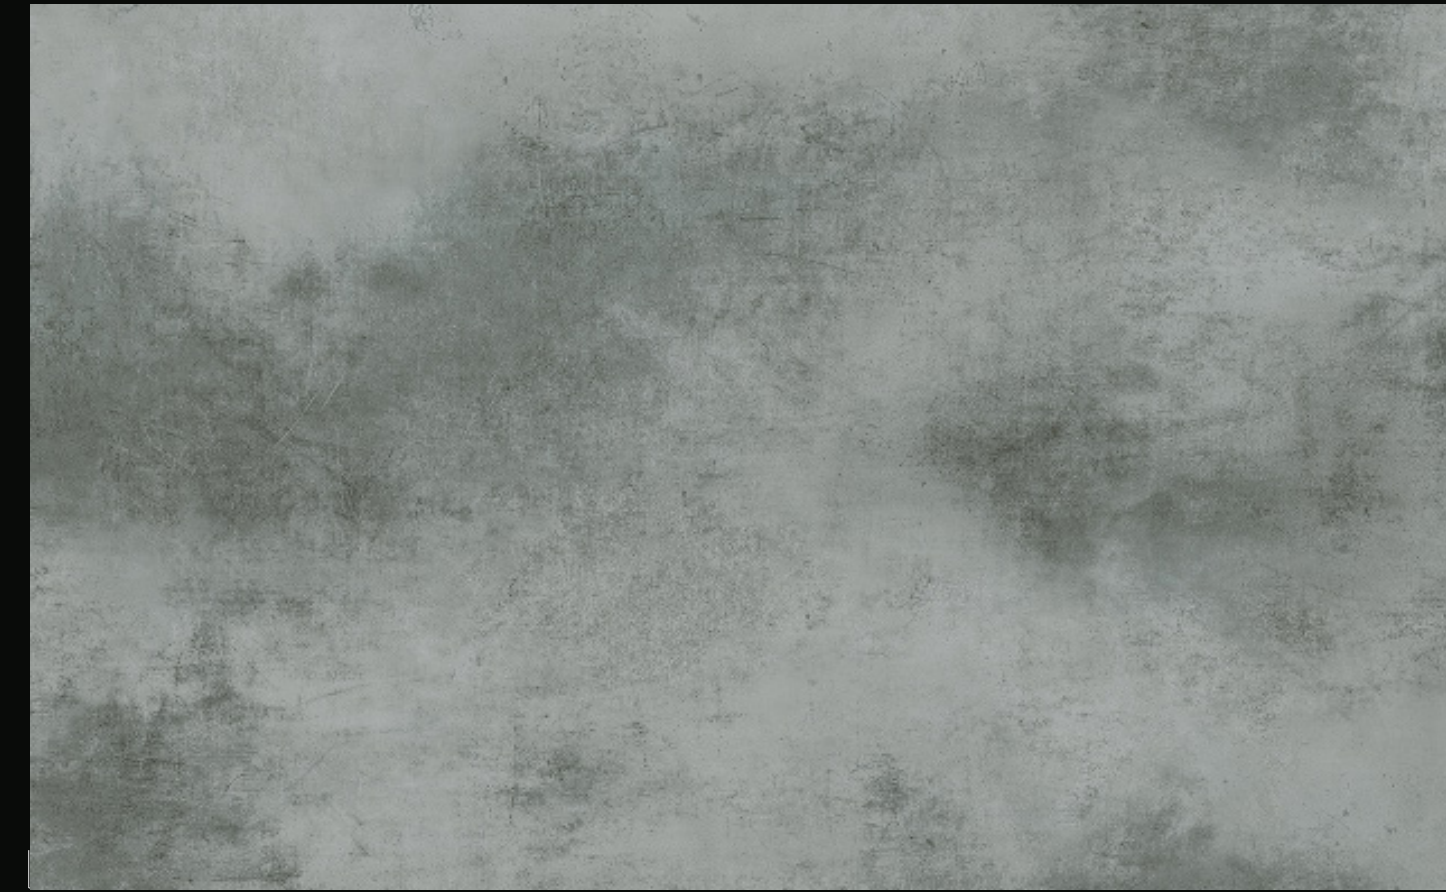
 RIGICORE 6.0 / RS965480 METAL PLATE RUSTY
 GLUEDOWN 2.5 / DB86548






 RIGICORE 6.0 / RS118430  TACKY LOOSELAY 5.0 / LL11843 PACIFIC LIMESTONE MEDIUM
 GLUEDOWN 2.5 / DB11843

ANTISCRATCH VIRGIN NON-PETROLATE OILS A+ GREEN GUARANTEE floor score EN 14041 CE

* ALL STONE / 0.55 COLOURS ARE AVAILABLE AS BOTH RIGICORE CLICK 6.0 AND GLUE DOWN 2.5
** THE COLOURS WITH THE  SYMBOL UNDERNEATH ARE ALSO AVAILABLE AS TACKY LOOSE LAY 5.0
*** MATCHING SKIRTINGS AVAILABLE FOR ALL STONE / 0.55 COLOURS



 RIGICORE 6.0 / RS118240  TACKY LOOSELAY 5.0 / LL11824 POLISHED LIMESTONE LIGHT
 GLUEDOWN 2.5 / DB11824

ANTISCRATCH VIRGIN NON-PETROLATE OILS A+ GREEN GUARANTEE floor score EN 14041 CE



 RIGICORE 6.0 / RS334420
 GLUEDOWN 2.5 / DB33442



AQUAREL WHITE TILE



 RIGICORE 6.0 / RS665420  TACKY LOOSELAY 5.0 / LL66542
 GLUEDOWN 2.5 / DB66542



CARRIBBEAN LIMESTONE GREY